




Laboratory refrigerators

Capacities from 12 - 72 cu ft



Features

- Powerful refrigeration system with low GWP refrigerant for high performance and reduced total cost of ownership
 - top-mounted modular Complete Refrigeration System (CRS) - all refrigeration components external to storage compartment for greater usable capacity
 - high volume airflow design for faster temperature recovery and uniform temperature
- Precise temperature control
 - microprocessor control with digital temperature display
 - factory preset at +4 C (adjustable from +1 C to +12 C)
- Engineered for sustainability
 - R290 low GWP refrigerant
 - ENERGY STAR® Certified, SNAP compliant, UL/cUL Listed
- Protection for your valuable products
 - audible and visual high/low temperature and door open alarms
 - dry contacts for remote alarming
 - access port for third party monitoring
 - key door lock

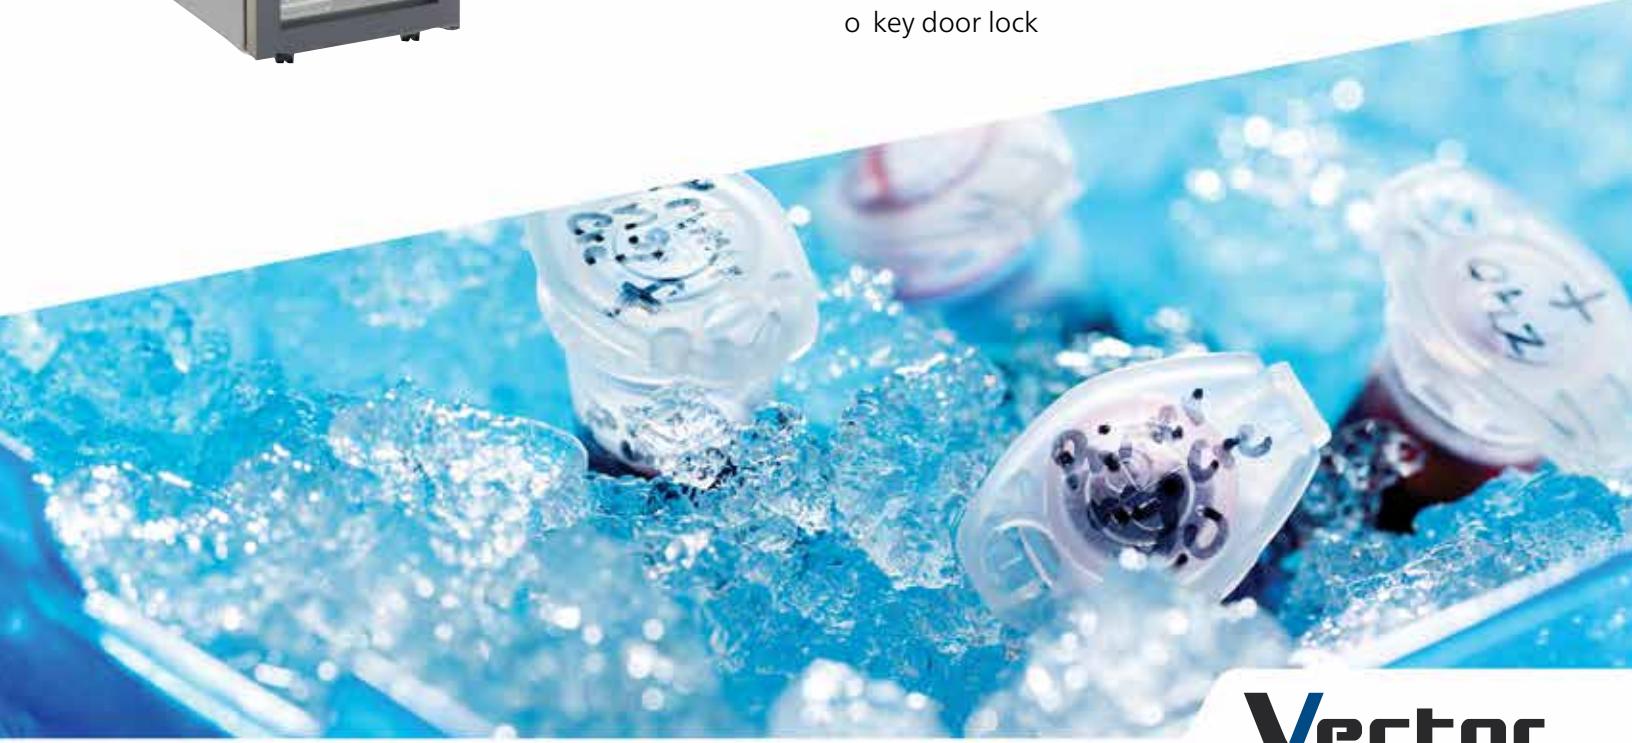

Visit vectorlabproducts.com for details on all Vector® products

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. VECTOR is a registered trademark of Follett Products, LLC, registered in the US.

Vector
Lab Products

Robust, "free-standing" Complete Refrigeration System (CRS) for easy serviceability or replacement. Top-mounted, exterior to product storage area, allowing full use of entire cabinet. Engineered to reduce energy consumption and ozone depleting emissions with R290 eco-friendly refrigerant



Model	capacity cu ft	height	width	depth	door hinge	door style	weight
VREF12-LB-RGD	11.8	74.80" (190.0 cm)	23.62" (60.0 cm)	25.35" (64.4 cm)	right	glass	286 lb (130 kg)
VREF12-LB-LGD	11.8	74.80" (190.0 cm)	23.62" (60.0 cm)	25.35" (64.4 cm)	left	glass	286 lb (130 kg)
VREF12-LB-RSD	11.8	74.80" (190.0 cm)	23.62" (60.0 cm)	23.62" (60.0 cm)	right	solid	254 lb (115 kg)
VREF25-LB-RGD	24.7	79.31" (201.4 cm)	28.35" (72.0 cm)	33.23" (84.4 cm)	right	glass	377 lb (171 kg)
VREF25-LB-LGD	24.7	79.31" (201.4 cm)	28.35" (72.0 cm)	33.23" (84.4 cm)	left	glass	377 lb (171 kg)
VREF25-LB-RSD	24.7	79.31" (201.4 cm)	28.35" (72.0 cm)	31.50" (80.0 cm)	right	solid	331 lb (150 kg)
VREF30-LB-RGD	31.8	81.50" (207.0 cm)	32.25" (82.0 cm)	39.25" (99.7 cm)	right	glass	465 lb (211 kg)
VREF30-LB-LGD	31.8	81.50" (207.0 cm)	32.25" (82.0 cm)	39.25" (99.7 cm)	left	glass	465 lb (211 kg)
VREF30-LB-RSD	31.8	81.50" (207.0 cm)	32.25" (82.0 cm)	37.48" (95.2 cm)	right	solid	419 lb (190 kg)
VREFCR30-LB-RGD	31.8	81.50" (207.0 cm)	32.25" (82.0 cm)	39.25" (99.7 cm)	right	glass	465 lb (211 kg)
VREF49-LB-OGD	49.5	79.31" (201.4 cm)	56.69" (145 cm)	33.23" (84.4 cm)	outer	glass	622 lb (282 kg)
VREF49-LB-OSD	49.5	79.31" (201.4 cm)	56.69" (145 cm)	31.50" (80.0 cm)	outer	solid	531 lb (241 kg)
VREF72-LB-RGD	74.2	79.31" (201.4 cm)	85.03" (216 cm)	33.23" (84.4 cm)	right	glass	772 lb (350 kg)
VREF72-LB-RSD	74.2	79.31" (201.4 cm)	85.03" (216 cm)	31.50" (80.0 cm)	right	solid	699 lb (317 kg)

Visit vectorlabproducts.com for details on all Vector® products

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. VECTOR is a registered trademark of Follett Products, LLC, registered in the US.

Vector
Lab Products

8980-202211